


Pendant recessed 250mA - 350mA

Tubsi | pendant recessed | rod: white


Length rod: 0-250cm, exact size to be specified when ordering

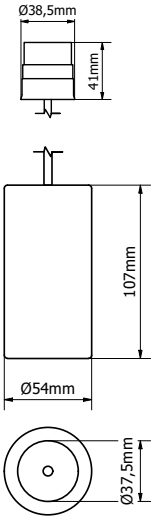

	60°	
	2700K CRI97	DTW 2800-1800K CRI95
	4W · 400lm · 350mA · 12Vf	4W · 480lm · 250mA · 17Vf
White RAL9016	WLTUBSI 0301010201	WLTUBSI 0301010202
Ano black	WLTUBSI 0302010201	WLTUBSI 0302010202
Ano champagne	WLTUBSI 0303010201	WLTUBSI 0303010202
Ano bronze	WLTUBSI 0304010201	WLTUBSI 0304010202
Travertin	WLTUBSI 0305010201	WLTUBSI 0305010202
White marble	WLTUBSI 0306010201	WLTUBSI 0306010202
Black marble	WLTUBSI 0307010201	WLTUBSI 0307010202
Black oak	WLTUBSI 0308010201	WLTUBSI 0308010202
Walnut	WLTUBSI 0309010201	WLTUBSI 0309010202

Tubsi | pendant recessed | rod: ano black


Length rod: 0-250cm, exact size to be specified when ordering

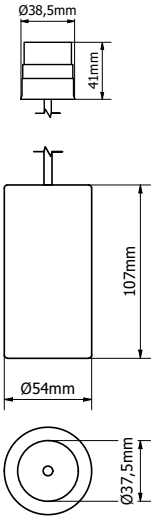

	60°	
	2700K CRI97	DTW 2800-1800K CRI95
	4W · 400lm · 350mA · 12Vf	4W · 480lm · 250mA · 17Vf
White RAL9016	WLTUBSI 0301020201	WLTUBSI 0301020202
Ano black	WLTUBSI 0302020201	WLTUBSI 0302020202
Ano champagne	WLTUBSI 0303020201	WLTUBSI 0303020202
Ano bronze	WLTUBSI 0304020201	WLTUBSI 0304020202
Travertin	WLTUBSI 0305020201	WLTUBSI 0305020202
White marble	WLTUBSI 0306020201	WLTUBSI 0306020202
Black marble	WLTUBSI 0307020201	WLTUBSI 0307020202
Black oak	WLTUBSI 0308020201	WLTUBSI 0308020202
Walnut	WLTUBSI 0309020201	WLTUBSI 0309020202

Tubsi | pendant recessed | rod: ano champagne

Length rod: 0-250cm, exact size to be specified when ordering



350mA INPUT

250mA INPUT

DIMMABLE

CE

IP20

RC


0-10V 1-10V

DALI

	60° 2700K CRI97 4W · 400lm · 350mA · 12Vf	60° DTW 2800-1800K CRI95 4W · 480lm · 250mA · 17Vf
White RAL9016	WLTUBSI 0301030201	WLTUBSI 0301030202
Ano black	WLTUBSI 0302030201	WLTUBSI 0302030202
Ano champagne	WLTUBSI 0303030201	WLTUBSI 0303030202
Ano bronze	WLTUBSI 0304030201	WLTUBSI 0304030202
Travertin	WLTUBSI 0305030201	WLTUBSI 0305030202
White marble	WLTUBSI 0306030201	WLTUBSI 0306030202
Black marble	WLTUBSI 0307030201	WLTUBSI 0307030202
Black oak	WLTUBSI 0308030201	WLTUBSI 0308030202
Walnut	WLTUBSI 0309030201	WLTUBSI 0309030202

Tubsi | pendant recessed | rod: ano bronze

Length rod: 0-250cm, exact size to be specified when ordering



350mA INPUT

250mA INPUT

DIMMABLE

CE

IP20

RC

0-10V 1-10V

DALI

	60° 2700K CRI97 4W · 400lm · 350mA · 12Vf	60° DTW 2800-1800K CRI95 4W · 480lm · 250mA · 17Vf
White RAL9016	WLTUBSI 0301040201	WLTUBSI 0301040202
Ano black	WLTUBSI 0302040201	WLTUBSI 0302040202
Ano champagne	WLTUBSI 0303040201	WLTUBSI 0303040202
Ano bronze	WLTUBSI 0304040201	WLTUBSI 0304040202
Travertin	WLTUBSI 0305040201	WLTUBSI 0305040202
White marble	WLTUBSI 0306040201	WLTUBSI 0306040202
Black marble	WLTUBSI 0307040201	WLTUBSI 0307040202
Black oak	WLTUBSI 0308040201	WLTUBSI 0308040202
Walnut	WLTUBSI 0309040201	WLTUBSI 0309040202

Installation accessories

Required installation options

Item code	Description	Cut-out
WLTUBSI FR0101	Tubsi pendant recessed trim frame white	ø48-50mm H45mm
WLTUBSI FR0102	Tubsi pendant recessed trim frame anodised black	ø48-50mm H45mm
WLTUBSI FR0103	Tubsi pendant recessed trim frame anodised champagne	ø48-50mm H45mm
WLTUBSI FR0104	Tubsi pendant recessed trim frame anodised bronze	ø48-50mm H45mm
WLTUBSI PK01	Tubsi pendant recessed trimless plasterkit	ø73-95mm H45mm



Required driver options - 350mA (2700K)

Item code	Description	Min	Max
MAINS DIM			
WL DRIVER01	WL LED Driver01 350mA 10W (1pcs) (mains dim)	1	2 *
WL DRIVER02	WL LED Driver02 350mA 18W (1pcs) (mains dim)	3	5 *
WL DRIVER09	WL LED Driver09 350mA 4W (1pcs) (mains dim)	1	1
1-10V / PUSH			
WL DRIVER06	WL Driver06 250-700mA 18W (1pcs) (1-10V/PUSH dim)	1	4 *
DALI			
WL DRIVER20	WL Driver20 250-700mA 30W (1pcs) (DALI dim)	1	4 *

(*) driver does not fit through installation opening

Required driver options - 250mA (DTW)


Item code	Description	Min	Max
MAINS DIM			
WL DRIVER10	WL Driver10 250mA 6W (1pcs) (mains dim)	1	1
WL DRIVER11	WL Driver11 250mA 10W (1pcs) (mains dim)	2	2 *
1-10V / PUSH			
WL DRIVER06	WL Driver06 250-700mA 18W (1pcs) (1-10V/PUSH dim)	1	2 *
DALI			
WL DRIVER20	WL Driver20 250-700mA 30W (1pcs) (DALI dim)	2	2 *

(*) driver does not fit through installation opening

Pendant recessed 24Vdc

Tubsi | pendant recessed | rod: white


Length rod: 0-250cm, exact size to be specified when ordering

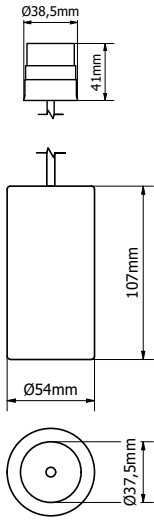

		60°
		2700K CRI97
		4W • 400lm • 24Vdc
	White RAL9016	WLTUBSI 0301010101
	Ano black	WLTUBSI 0302010101
	Ano champagne	WLTUBSI 0303010101
	Ano bronze	WLTUBSI 0304010101
	Travertin	WLTUBSI 0305010101
	White marble	WLTUBSI 0306010101
	Black marble	WLTUBSI 0307010101
	Black oak	WLTUBSI 0308010101
	Walnut	WLTUBSI 0309010101

Tubsi | pendant recessed | rod: ano black

Length rod: 0-250cm, exact size to be specified when ordering

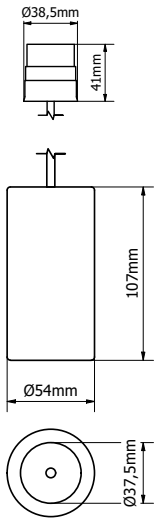


		60°
		2700K CRI97
		4W • 400lm • 24Vdc
	White RAL9016	WLTUBSI 0301020101
	Ano black	WLTUBSI 0302020101
	Ano champagne	WLTUBSI 0303020101
	Ano bronze	WLTUBSI 0304020101
	Travertin	WLTUBSI 0305020101
	White marble	WLTUBSI 0306020101
	Black marble	WLTUBSI 0307020101
	Black oak	WLTUBSI 0308020101
	Walnut	WLTUBSI 0309020101

Tubsi | pendant recessed | rod: ano champagne

Length rod: 0-250cm, exact size to be specified when ordering



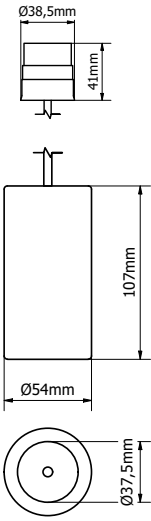

24Vdc
INPUT

DIMMABLE

CE

IP20


0-10V
1-10V

	60°
	2700K CRI97
	4W • 400lm • 24Vdc
White RAL9016	WLTUBSI 0301030101
Ano black	WLTUBSI 0302030101
Ano champagne	WLTUBSI 0303030101
Ano bronze	WLTUBSI 0304030101
Travertin	WLTUBSI 0305030101
White marble	WLTUBSI 0306030101
Black marble	WLTUBSI 0307030101
Black oak	WLTUBSI 0308030101
Walnut	WLTUBSI 0309030101

Tubsi | pendant recessed | rod: ano bronze

Length rod: 0-250cm, exact size to be specified when ordering



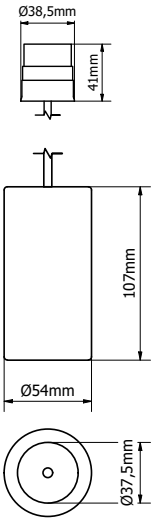

24Vdc
INPUT

DIMMABLE

CE

IP20

0-10V
1-10V

	60°
	2700K CRI97
	4W • 400lm • 24Vdc
White RAL9016	WLTUBSI 0301040101
Ano black	WLTUBSI 0302040101
Ano champagne	WLTUBSI 0303040101
Ano bronze	WLTUBSI 0304040101
Travertin	WLTUBSI 0305040101
White marble	WLTUBSI 0306040101
Black marble	WLTUBSI 0307040101
Black oak	WLTUBSI 0308040101
Walnut	WLTUBSI 0309040101

Installation accessories

Required installation options

Item code	Description	Cut-out
WLTUBSI FR0101	Tubsi pendant recessed trim frame white	ø48-50mm H45mm
WLTUBSI FR0102	Tubsi pendant recessed trim frame anodised black	ø48-50mm H45mm
WLTUBSI FR0103	Tubsi pendant recessed trim frame anodised champagne	ø48-50mm H45mm
WLTUBSI FR0104	Tubsi pendant recessed trim frame anodised bronze	ø48-50mm H45mm
WLTUBSI PK01	Tubsi pendant recessed trimless plasterkit	ø73-95mm H45mm



Required driver options 24Vdc

Item code	Description	Min	Max
NON DIM			
WL DRIVER17	WL Driver17 24Vdc 12W (1pcs) (non-dim)	1	2 *
MAINS DIM			
WL DRIVER13	WL Driver13 24Vdc 36W (1pcs) (mains dim)	1	7 *
WL DRIVER16	WL Driver16 24Vdc 60W (1pcs) (mains dim)	1	12 *
1-10V/DALI/PUSH			
WL DRIVER14	WL Driver14 24Vdc 70W (1pcs) (1-10V/DALI dim)	1	15 *
WL DRIVER19	WL Driver19 24Vdc 120W (1pcs) (1-10V/DALI dim)	1	25 *
(*) driver does not fit inside ceiling box			